



**Function**

- Used to regulate and control high pressures in standpipe and sprinkler systems

**Features/Characteristics**

- Constant pressure regulation under residual (flowing) and static (non-flowing) conditions
- Tamper-proof pressure setting (Factory Set)
- Valve seat acts as checking device and closes when inlet pressures drop below selected static outlet pressures
- Optional monitor switch adapter bracket\* permits valve supervision by electrical means
- Angle type 1½" and 2½", inline (straight) type 2½" size
- Female pipe inlet x female pipe or male hose thread outlet
- Cast brass body\*\* with brass and stainless steel internals

\*Add suffix **-bkt2** to model no. for bracket

\*\*Add suffix **-C** to model no. for rough chrome plated finish

Model No.	Size	Outlet	A	B	C	D
<b>5240</b>	1½" x 1½"	Male NST	4"	7¾"	2¾"	5⅞"
<b>5245</b>	2½" x 2½"	Male NST	5"	10⅞"	3⅞"	7¾"
<b>5250</b>	1½" x 1½"	Female NPT	4"	7¾"	2¾"	5⅞"
<b>5255</b>	2½" x 2½"	Female NPT	5"	11"	3¼"	8⅞"
<b>5260</b>	2½" X 2½"	Female NPT	5"	12⅞"	7½"	10"


\*Dimensions are for valve in closed position, add ¾" for open position

**Ordering Procedure**


- Select valve model no.
- Contact factory for pressure charts and "type" selection

**Accessories**



- **Model 9390** Supervisory switch, refer to page 92
- **Model 9465** Pressure gauge, refer to page 93
- **Model 9325** Water flow detector switch, refer to page 92
- **Series 9200** Test and drain connections, refer to pages 90/91
- **Model 3340/3345** Drain riser connection, refer to page 31 for snoots and page 63 for **Model 6404** plug
- **Model 5275** Adjustable pressure relief valve, ¾" brass (or **Model 5280** fixed pressure type)

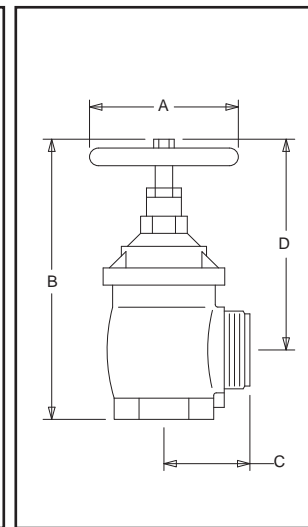


**5240/5245**

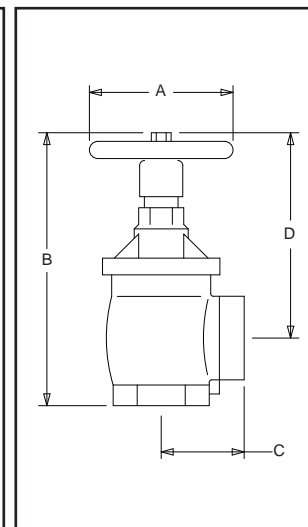

**5250/5255**

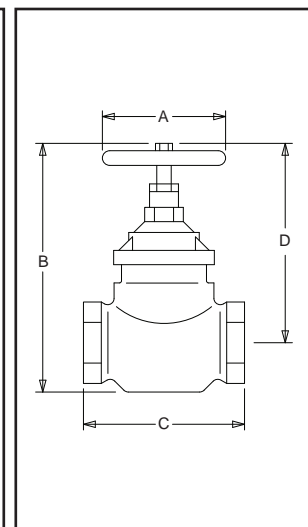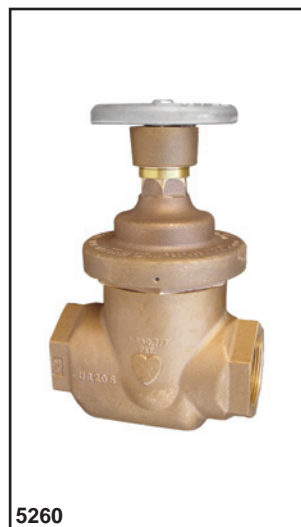

**5260**



**-bkt2**

Contact factory for current UL listing and special requirements

**\*\*Important: Specify Hose Threads\*\***