

2400 Series Hose Reel Cabinets

GUARDIAN
FIRE EQUIPMENT, INC.



Accommodates

- Continuous Flow European Type Hose Reel

Standard Construction & Features

- One piece 20 gauge cold-rolled steel door and frame, 18 gauge steel box
- Door is reinforced with rigid tubular metal
- Continuous steel piano hinge and pin
- White baked acrylic enamel finish*
- Door handle hardware

*Suitable as prime or finish coat

Optional Door & Frame Materials

- Add prefix **AL** to cabinet model no. for aluminum (clear anodized finish)
- Add prefix **SS** to cabinet model no. for 304 stainless steel (#4 brushed finish)
- Add suffix **-RED** to steel cabinet model no. for red baked acrylic enamel finish

Refer to page 5 for details

Ordering Procedure

- Select cabinet model number
- Select cabinet door style (refer to page 6)
- Select continuous flow reel (refer to page 35)

Standard Construction

Model No.	Mounting Style	Trim A	Inside Box Dimensions				Frame O.D.*		Wall Opening			ADA
			B	C	D	E	F	Width	Height	Depth		
2410	Trimless	--	30"	30"	12"	--	--	31"	31"	12½"	✓	
2420	Recessed	⅜"	30"	30"	12"	33½"	33½"	31"	31"	12¼"	✓	
2430	Semi-Rec.	1¼"	30"	30"	12"	33½"	33½"	31"	31"	11¼"	✓	
2440	Semi-Rec.	2½"	30"	30"	12"	33½"	33½"	31"	31"	10"	✓	
2450	Surface	12¼"	33½"	33½"	12¼"	33½"	33½"	--	--	--	No	

*Deduct ¼" O.D. for aluminum door and frame





Fire-Rated

Model No.	Mounting Style	Trim A	Inside Box Dimensions				Frame O.D.*		Knockout Location		Wall Opening			ADA
			B	C	D	E	F	G	H	Width	Height	Depth		
FR2420	Recessed	⅜"	30"	30"	12"	33½"	33½"	--	--	32⅞"	32⅞"	13⅞"	✓	
FR2430	Semi-Rec.	1¼"	30"	30"	12"	33½"	33½"	--	--	32⅞"	32⅞"	12⅞"	✓	
FR2440	Semi-Rec.	2½"	30"	30"	12"	33½"	33½"	--	--	32⅞"	32⅞"	11"	✓	

Note: Fire-Rated cabinets are fabricated in accordance with **WARNOCK HERSEY** certified designs and labelled for 1 and 2-hour combustible and non-combustible walls. Boxes are double-wall construction, lined with fire resistant material.



2400 Series

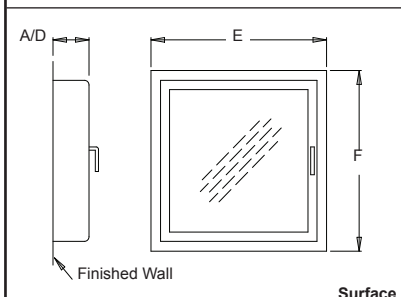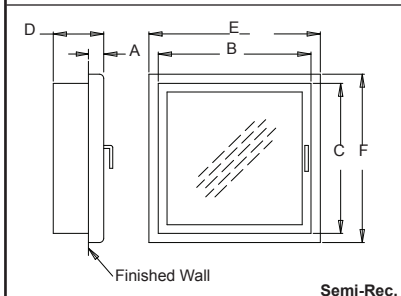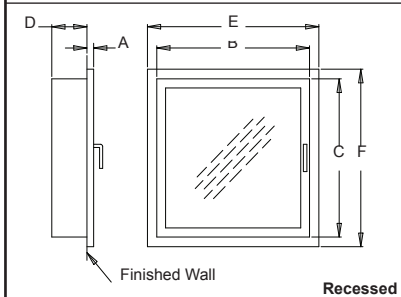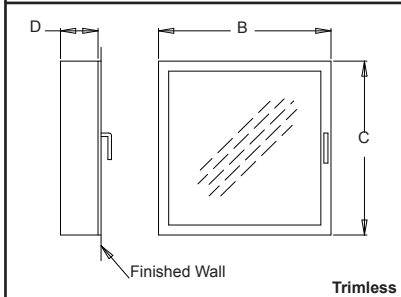

No knockouts provided, unless otherwise specified.