



**Selectable Gallonage Nozzles**

- Used to shape and direct water stream for fire protection
- Flows remain constant in all patterns
- Pattern detents for positive pattern positioning
- Compatible with **Class A and B** foams
- Hard-anodized aluminum construction
- **Models 3750-3756** with pistol grip and handle shut-off
- **Model 3758** with axial playpipe and handle shut-off

Model No.	Base	Flow
<b>3750</b>	1"	13-25-40-60 GPM
<b>3752*</b>	1 1/2"	30-60-95-125 GPM
<b>3754</b>	1 1/2"	95-125-150-200 GPM
<b>3756*</b>	2 1/2"	95-125-200-250 GPM
<b>3758</b>	2 1/2"	95-125-200-250 GPM

\*Also available in brass, add suffix **-B** to model no. to specify



**3750-3754**



**3756**



**3758**

**Single Gallonage Nozzles**

- Used to shape and direct water stream for fire protection
- Flows remain constant in all patterns
- Pattern detents for positive pattern positioning
- Compatible with **Class A and B** foams
- Hard-anodized aluminum construction
- Pistol grip and handle shut-off

Model No.	Base	Flow
<b>3762</b>	1 1/2"	95 GPM standard (60 or 125 optional)
<b>3764</b>	2 1/2"	250 GPM standard (200 or 300 optional)



**3762**



**3764**


**Automatic Fixed Pressure Nozzles**

- Used to shape and direct water stream for fire protection
- Pressure remains constant throughout flow range
- Pattern detents for positive pattern positioning
- Compatible with **Class A and B** foams
- Hard-anodized aluminum construction
- Pistol grip and handle shut-off

Model No.	Base	Flow
<b>3772</b>	1 1/2"	60-125 GPM
<b>3774</b>	1 1/2"	60-200 GPM



**3772**

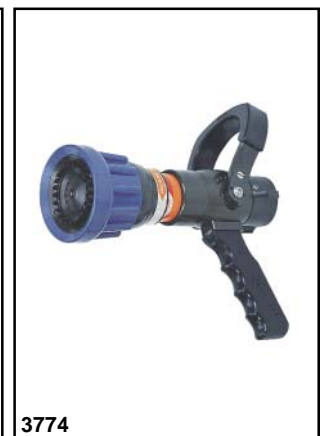

**3774**