



GUARDIAN

FIRE EQUIPMENT, INC.
MIAMI, FL

Ph. 800.327.6584 • Fax 800.827.3869

DETAIL AND SUBMITTAL SHEET

6400 Series - Fire Dept. Inlet Connections - Accessories

Project/Location: _____

Date: _____

Architect/Engineer: _____

Qty: _____

Contractor: _____

Appropriate Selection

Plugs and Break Caps - Used to keep fire dept. inlet connections free of debris and protect female threads, not intended for pressure application.

Model No.	Configuration
<input type="checkbox"/> 6402	1 1/2" cast brass* plug with chain
<input type="checkbox"/> 6404	2 1/2" cast brass* plug with chain

Optional Finish:


- B Polished Brass -C Rough Chrome Plated
 -D Polished Chrome Plated

Threads: NST Other _____

Model No.	Configuration
<input type="checkbox"/> 6406	2 1/2" alum. break cap
<input type="checkbox"/> 6407	2 1/2" plastic break cap
<input type="checkbox"/> 6408	2 1/2" alum. adj. plug
<input type="checkbox"/> 6409	2 1/2" plastic adj. plug



6402/6404

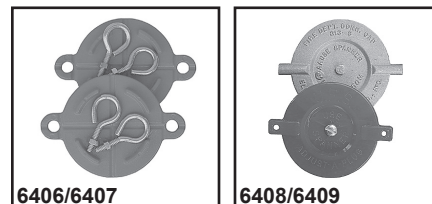

6406/6407

6408/6409

Cover Sleeve - Used to conceal incoming pipe of free-standing fire department connection.

Model No.	Configuration
<input type="checkbox"/> 6414	4" x 18"
<input type="checkbox"/> 6416	6" x 18"

Optional Finish: -D Polished Chrome Plated

Clappered Snoots - Used on fire department inlet connections to check backflow. Cast brass body, polished trim.


Model No.	Configuration
<input type="checkbox"/> 6418	2 1/2" female swivel inlet x 3" female NPT outlet
<input type="checkbox"/> 6419	2 1/2" female swivel inlet x 3" male NPT outlet

Optional Finish: -D Polished Chrome Plated trim

Threads: NST Other _____



6414/6416

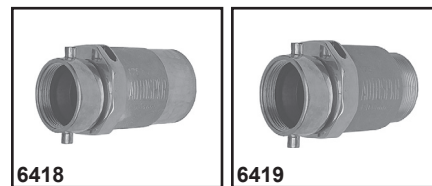

6418

6419

Swing Check Valve - Used to prevent water backflow

Model No.	Configuration
<input type="checkbox"/> 6420	4" groove x groove, cast brass
<input type="checkbox"/> 6421	4" NPT male x groove, cast brass
<input type="checkbox"/> 6422	4" NPT male x NPT female, cast brass



6420-6422

Wafer Check Valve - Used to prevent water backflow


Model No.	Configuration
<input type="checkbox"/> 6426	4" ductile iron
<input type="checkbox"/> 6428	6" ductile iron



6426/6428

Automatic Ball Drip - Used to drain water from the low point of the system

Model No.	Configuration
<input type="checkbox"/> 6430	1/2" NPT, male x male, straight, cast brass
<input type="checkbox"/> 6431	1/2" NPT, male x male, angle, cast brass
<input type="checkbox"/> 6432	3/4" NPT, male x male, straight, cast brass
<input type="checkbox"/> 6433	3/4" NPT, male x male, angle, cast brass

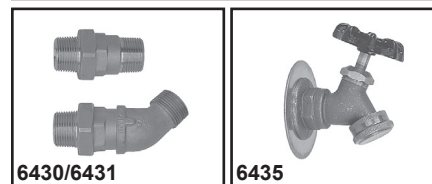

6430/6431

6435

Sillcock - Used to manually drain water from low point or washdown

Model No.	Configuration
<input type="checkbox"/> 6435	3/4" female NPT x male GHT, cast brass

Optional Finish: -D Polished Chrome Plated