



# Guardian Fire Equipment, Inc.

3430 NW 38th Street

Miami, Florida 33142

Phone: (305) 633-0361 • Fax: (305) 638-4632


## FIXED REEL COMPONENTS MODEL 3621 (3/4") / 3622 (1")

PART	QTY	DESCRIPTION
A	1	1" BALL VALVE OR GLOBE VALVE *
B	1	1" HOSE SHANK COUPLING
C	1	1" CONNECTION HOSE (2 FEET)
D	4	WORM DRIVE CLAMP OR COMPRESSION CLAMP *
E	1	WALL BRACKET

PART	QTY	DESCRIPTION
F	1	HOSE REEL
G	1	HOSE (3/4" OR 1" / LENGTH) *
H	1	NOZZLE (3/4" OR 1") *
I	1	I.D. PLATE + DECAL

### \* SPECIFY ON ORDER

NOTE: SPECIAL TOOL REQUIRED FOR INSTALLING COMPRESSION CLAMPS

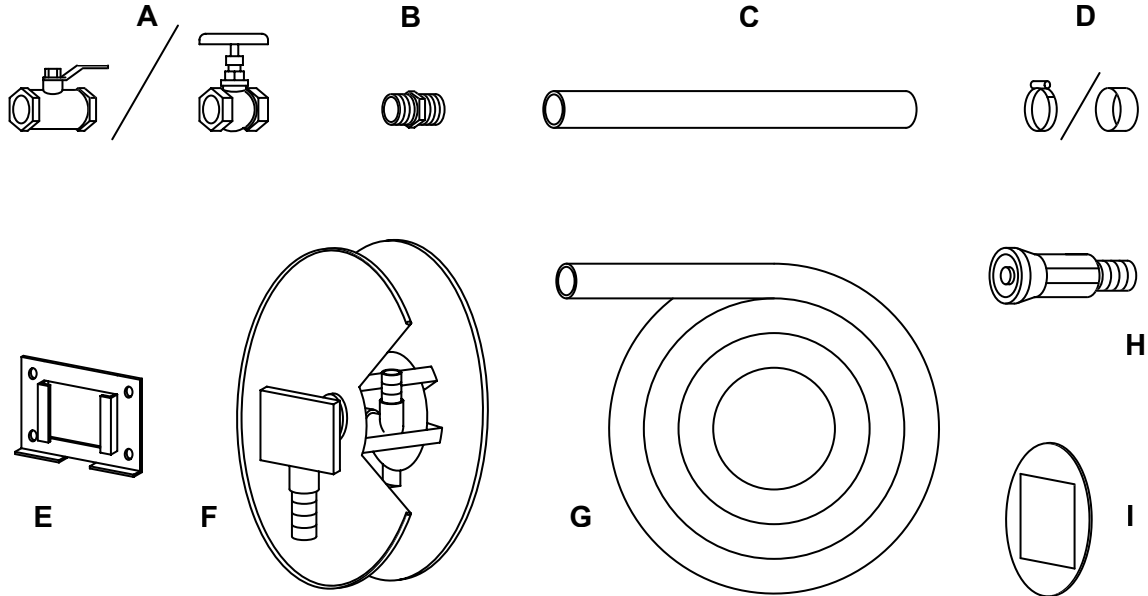

### INSTALLATION:

- 1 - INSTALL SUPPLY VALVE "A" AND HOSE SHANK COUPLING "B"
- 2 - INSTALL BRACKET "E" IN DESIGNATED REEL LOCATION
- 3 - CONNECT HOSE "C" TO EXTERNAL BARB SHANK OF HOSE REEL "F" USING ONE "D" CLAMP
- 4 - INSTALL HOSE REEL "F" ONTO WALL BRACKET "E"
- 5 - CONNECT HOSE "C" TO HOSE SHANK COUPLING "B" USING ONE "D" CLAMP
- 6 - CONNECT HOSE "G" TO INTERNAL BARB SHANK OF HOSE REEL "F" USING ONE "D" CLAMP, THEN WIND HOSE ONTO REEL
- 7 - CONNECT OTHER END OF HOSE "G" TO NOZZLE "H" USING ONE "D" CLAMP
- 8 - INSTALL I.D. PLATE "I" BY ALIGNING IT'S PINS WITH HOLES ON REEL "F", THEN PUSHING INTO POSITION