



GUARDIAN

FIRE EQUIPMENT, INC.
MIAMI, FL

Ph. 800.327.6584 • Fax 800.827.3869

DETAIL AND SUBMITTAL SHEET

5600 Series - Municipal Valves

Project/Location: _____ Date: _____

Architect/Engineer: _____


Contractor: _____

Appropriate Selection

Ball-Type Hydrant Valve - Used on 2 1/2" fire hydrant outlets for rapid "on/off" control of flow. Cast aluminum construction with body finished in red enamel and hard-coated trim. Full flow acetal ball with teflon seats. Detent-lock stainless steel handle with ball end. Female host thread swivel inlet x male hose thread outlet.

Model No.	Size	A	B	C	D
<input type="checkbox"/> 5610	2 1/2" x 2 1/2"	7 3/8"	2 3/4"	7 3/4"	3 3/8"


Threads: NST Other _____

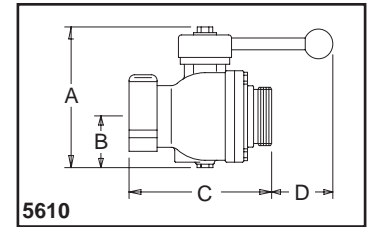

Hydrant Gate Valves - Used on 2 1/2" fire hydrant outlets for a slow and precise control of flow (throttling). Cast aluminum construction with body finished in red enamel and hard-coated trim. Metal to metal seat, brass and aluminum internals. Stainless steel non-rising stem with "easy-turn" aluminum crank handle. Female hose thread swivel inlet x male hose thread outlet.

Model No.	Size	A	B	C	D
<input type="checkbox"/> 5620	2 1/2" x 2 1/2"	11 7/8"	2 1/8"	5"	2 3/8"

Threads: NST Other _____

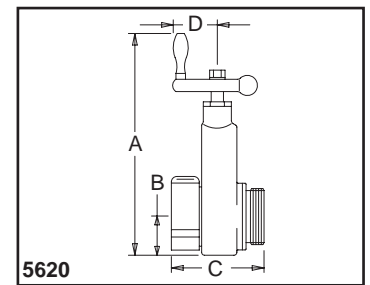

Wyes, Siamese and Waterthief - Used to change the number and/or size of working hose lines. Cast aluminum construction with body finished in red enamel and hard-coated trim. Full flow acetal balls with teflon seats. Detent-lock handles with ball ends. Hose thread inlets and outlets.

Model No.	Description	A	B	C	D
<input type="checkbox"/> 5630	Wye, 2 1/2" F. swivel x (2) 1 1/2" M.	12 7/16"	4 5/8"	3 1/2"	---
<input type="checkbox"/> 5632	Wye, 2 1/2" F. swivel x (2) 2 1/2" M.	8 7/16"	6 1/8"	9 9/16"	---
<input type="checkbox"/> 5634*	Wye, 2 1/2 - 6" F. swivel x (3) 2 1/2" M.	14 7/16"	22 1/16"	7 1/16"	---
<input type="checkbox"/> 5640*	Siamese, 2 1/2 - 6" F. swivel x (3) 2 1/2" F.	14 7/16"	4 1/16"	7 1/16"	7"
<input type="checkbox"/> 5650	Waterthief, 2 1/2" F. swivel x 2 1/2" M. plus (2) 1 1/2" M.	13"	7 1/8"	14 9/16"	4 13/16"

*Specify Female Connection: 2 1/2" 4" 6"

Threads: NST Other _____

