



9205

**Function**

- Used to test water flow through sprinkler systems
- All models available in 1", 1 1/4", 1 1/2" and 2" NPT sizes



9210

**Model 9205**

**Sight Glass**

- Cast iron, with acrylic see-through windows

**Model 9210**

**Test and Drain Assembly**

- Two-position ball valve (1/2" restricted orifice for test and full open for drain) with sight glass



9215

**Model 9215**

**Test and Drain Assembly with Shut-Off**

- Two-position ball valve (1/2" restricted orifice for test and full open for drain) with sight glass and ball shut-off valve



9220

**Model 9220**

**Test and Drain Assembly with Shut-Off**

- Two-position ball valve (1/2" restricted orifice for test and full open for drain) with sight glass and globe shut-off valve




9225

**Model 9225**

**Pressure Relief Assembly with Shut-Off**

- Field adjustable pressure relief (50-200 PSI), with globe shut-off valve

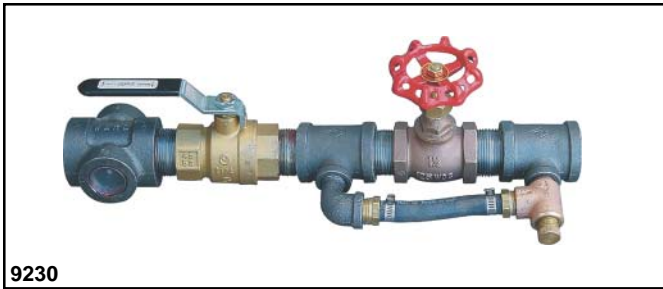

9230

**Model 9230**

**Test and Drain Assembly with Pressure Relief and Shut-Off**

- Two-position ball valve (1/2" restricted orifice for test and full open for drain), sight glass and field-adjustable pressure relief (50-200 PSI) with globe shut-off valve

**Notes**

- Specify **model no.** and size
- 1/2" restricted orifices furnished as standard, unless otherwise specified - contact factory for availability of special sizes