



**Accommodates**

- 1½" Fire Hose Rack Assembly, Fire Extinguisher and 2½" Fire Dept. Valve

**Standard Construction & Features**


- One piece 20 gauge cold-rolled steel door and frame, 18 gauge steel box
- Door is reinforced with rigid tubular metal
- Continuous steel piano hinge and pin
- White baked acrylic enamel finish\*
- Door handle hardware

\*Suitable as prime or finish coat





**Optional Door & Frame Materials**

- Add prefix **AL** to cabinet model no. for aluminum (clear anodized finish)
- Add prefix **SS** to cabinet model no. for 304 stainless steel (#4 brushed finish)
- Add suffix **-RED** to steel cabinet model no. for red baked acrylic enamel finish

Refer to page 5 for details

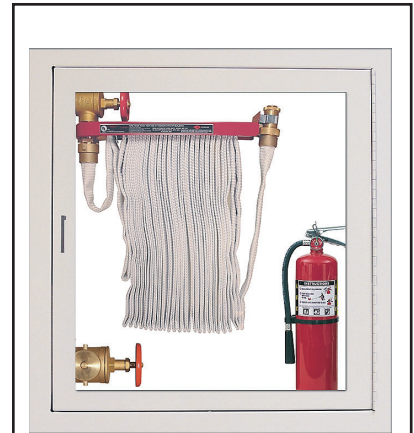

**1500 Series**

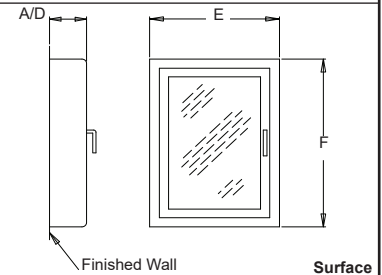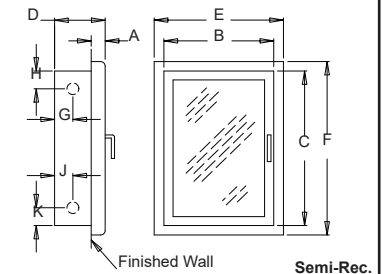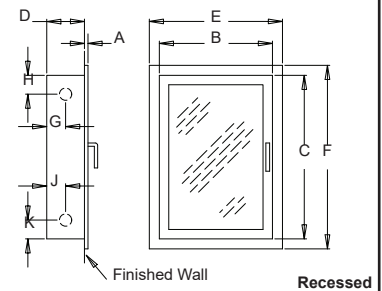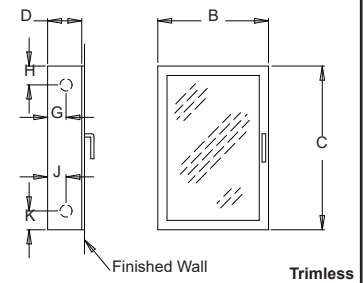

Trimless, recessed & semi-rec. cabinets furnished with combination knockouts (1½" & 2½") on both sides of box.

**Ordering Procedure**

- Select cabinet model number
- Select cabinet door style (refer to page 6)
- Select fire hose rack assembly (refer to page 28)
- Select fire extinguisher (refer to pages 43 - 45)
- Select fire dept. valve (refer to page 50)

**Standard Construction**

Model No.	Mounting Style	Trim A	Inside Box Dimensions				Frame O.D.*		Knockout Location				Wall Opening			ADA
			B	C	D	E	F	G	H	J	K	Width	Height	Depth		
1510	Trimless	--	32"	38"	8"	--	--	4"	4"	4"	4"	33"	39"	8½"	✓	
1520	Recessed	¾"	32"	38"	8"	35½"	41½"	4"	4"	4"	4"	33"	39"	8¼"	✓	
1530	Semi-Rec.	1½"	32"	38"	8"	35½"	41½"	4"	4"	4"	4"	33"	39"	7¼"	✓	
1540	Semi-Rec.	2½"	32"	38"	8"	35½"	41½"	4"	4"	4"	4"	33"	39"	6"	✓	
1550	Surface	9"	35½"	41½"	8¼"	35½"	41½"	--	--	--	--	--	--	--	No	

\*Deduct ¾" O.D. for aluminum door and frame

**Fire-Rated**

Model No.	Mounting Style	Trim A	Inside Box Dimensions				Frame O.D.*		Knockout Location				Wall Opening			ADA
			B	C	D	E	F	G	H	J	K	Width	Height	Depth		
FR1520	Recessed	¾"	32"	38"	8"	35½"	41½"	--	--	--	--	34⅞"	40⅞"	9⅞"	✓	
FR1530	Semi-Rec.	1½"	32"	38"	8"	35½"	41½"	--	--	--	--	34⅞"	40⅞"	8⅞"	✓	
FR1540	Semi-Rec.	2½"	32"	38"	8"	35½"	41½"	--	--	--	--	34⅞"	40⅞"	7"	✓	

**Note:** Fire-Rated cabinets are fabricated in accordance with **WARNOCK HERSEY** certified designs and labelled for 1 and 2-hour combustible and non-combustible walls. Boxes are double-wall construction, lined with fire resistant material.